

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

! IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1. ELECTRICAL SAFETY

! WARNING! It is the responsibility of the owner and the operator to read, understand and comply with the following: You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. We also recommend that a Residual Current Device (RCD) is used. It is particularly important to use an RCD with portable products that are plugged into a supply which is not protected by an RCCB. If in any doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer. **You must also read and understand the following instructions concerning electrical safety.**

1.1.1. The **Electricity at Work Act 1989** requires that all portable electrical appliances, if used on business premises, are tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.

1.1.2. The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. **If in any doubt about electrical safety, contact a qualified electrician.**

1.1.3. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply. See 1.1.1. and and use a Portable Appliance Tester.

1.1.4. Ensure that cables are always protected against short circuit and overload.

1.1.5. Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none is loose.

1.1.6. **Important:** Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating at right.

1.1.7. **DO NOT** pull or carry the appliance by the power cable.

1.1.8. **DO NOT** pull the plug from the socket by the cable.

1.1.9. **DO NOT** use worn or damaged cables, plugs or connectors. Immediately have any faulty item repaired or replaced by a qualified electrician. When a BS 1363/A UK 3 pin plug is damaged, cut the cable just above the plug and **dispose of the plug safely.**


Fit a new plug according to the following instructions (UK only).

a) **Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.**

b) **Connect the BROWN live wire to the live terminal 'L'.**

c) **Connect the BLUE neutral wire to the neutral terminal 'N'.**

d) **After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable outer insulation extends beyond the cable restraint and that the restraint is tight.**

Double insulated products, which are always marked with this symbol , are fitted with live (brown) and neutral (blue) wires only. To rewire, connect the wires as indicated above - **DO NOT** connect either wire to the earth terminal.


1.1.10. Products which require more than 13 amps are supplied without a plug. In this case you must contact a qualified electrician to ensure that a suitably rated supply is available. We recommend that you discuss the installation of an industrial round pin plug and socket with your electrician.

1.1.11. If an extension reel is used it should be fully unwound before connection. A reel with an RCD fitted is preferred since any appliance plugged into it will be protected. The cable core section is important and should be at least 1.5mm², but to be absolutely sure that the capacity of the reel is suitable for this product and for others which may be used in the other output sockets, we recommend the use of 2.5mm² section cable.

1.2 GENERAL SAFETY

! WARNING! Ensure *Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.*

- ✓ Familiarise yourself with the application, limitations and potential hazards of the soldering iron/gun.
- ✓ Replace or repair damaged parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Locate soldering iron/gun in a suitable working area, keep area clean and tidy and free from unrelated materials.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep the soldering iron/gun clean for best and safest performance.
- ✓ Ensure there are no flammable or combustible materials near the work area.
- ✓ Wear approved safety eye protection (standard spectacles are not adequate).
- ✓ Wear appropriate protective clothing.
- ✓ Ensure the workpiece is adequately held before operating the soldering iron/gun.
- ✓ Always lay the soldering gun on its side so that the tip cannot make contact with the work surface.
- ✓ Remove excess solder from the soldering gun by wiping the tip on a damp, natural sponge.
- ✓ Ensure that when the soldering gun is put down during use that the tip is not near to or in contact with any material that may burn or melt including the product's own supply lead.
- x **DO NOT** attempt to remove excess solder from the soldering iron/gun by shaking it. Hot solder may become airborne and land on your skin causing burns and blisters.
- x **DO NOT** allow children or pets into the area where the soldering is taking place.
- x **DO NOT** attempt to cool the gun with water.



- **WARNING!** Disconnect the soldering gun from the mains power and allow it to cool before changing tips.
- x **DO NOT** operate the soldering gun when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- x **DO NOT** leave a hot soldering gun unattended.
(If you are leaving the work area even for a short period of time switch it off and allow to cool.)
- x **DO NOT** use the soldering gun for any purpose other than that for which it has been designed.
- x **DO NOT** allow untrained persons to operate the soldering gun.
- x **DO NOT** touch the workpiece as it will be very hot. Allow to cool.
- x **DO NOT** operate the soldering gun if damaged.
- x **DO NOT** hold the workpiece by hand.
- x **DO NOT** allow children to operate the soldering gun.


2. SD200 CONTENTS

- Instant heat soldering gun (100Watt)
- Spare soldering tip
- Roll of flux-cored solder wire.

3. SET UP AND OPERATION

The 100 Watt soldering gun is primarily intended for electrical and electronic use. Its main advantage is the ability to heat up within 20 seconds of pressing the trigger. The tip temperature will reach 300°C so care must be taken with delicate electronic components that may be damaged if excessively heated.

- 3.1 **Duty cycle.** The gun has a duty cycle of 12 seconds continuous soldering which should be followed by a 48 second rest. If the trigger is held for less than 12 seconds the necessary rest period needed will be correspondingly less.
 - **WARNING!** Do not try to lock the trigger by any means as this will overheat the tip and the transformer causing permanent damage and will invalidate your guarantee.
- 3.2 **Preparing the gun.** Prepare the gun by 'tinning' the tip with a thin layer of solder. If any difficulty is experienced getting the solder to take to the tip use a proprietary tip tinner/cleaner.
- 3.3 **Holding/preparing the work.** Ensure that the items to be joined are clean and securely held together. Where possible a good joint will more easily obtained if the items to be joined are tinned separately first.
- 3.4 **Soldering.** Press and hold the trigger for approximately 20 seconds to get the tip to full temperature. Bring the tip of the gun and the solder to the joint simultaneously. Leave the iron on the joint just long enough to melt the solder so that it flows onto the two parts to be joined. Remove the gun and release the trigger. Leave the joint to cool. When the gun is not in use, but still hot, ensure that when it is put down the tip is not touching, or close to, any material that will melt or is inflammable.
- 3.5 **Changing tips.** Disconnect the gun from the mains and wait until the gun is completely cold. Loosen the two screws holding the tip. Remove the tip and insert the new one. Tighten the screws. If the old tip is difficult to remove, grip it with a pair of pliers and pull it out. Do not use pliers to insert the new tip as the plating may be damaged.
- 3.6 **Maintenance.** Do not allow solder to accumulate where the tip enters the gun as this may make the tip difficult to remove. Do not get solder deposits on the tip retaining screws as this may prevent a screwdriver fitting into the cross head. Periodically, use a proprietary tip cleaner/tinner to keep the gun clean an correctly tinned.
- 3.7 Spare tips for gun: - Model No. SD02 (Card of two)

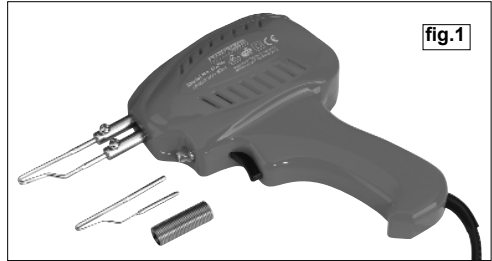

Declaration of Conformity We, the sole importer into the UK of Sealey Power Products, declare that the product listed below is in conformity with the following standards and directives.

**Instant Heat Soldering Gun
Model No. SD200**

73/23/EEC Low Voltage Directive
89/336/EEC EMC Directive
93/68/EEC CE Marking Directive



The construction file for this product is held by the manufacturer and may be inspected, by a national authority, upon request to Jack Sealey Ltd.

Signed by Tim Thompson  9th February 2006

For Jack Sealey Ltd. Sole importer into the UK of Sealey Power Products.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.
IMPORTANT: No liability is accepted for incorrect use of product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** Call 01284 757525 for our latest catalogue & promotion and leave your full name and address including your postcode.

SEALEY POWER PRODUCTS

Sole UK Distributor
Sealey Group,
Bury St. Edmunds, Suffolk.



www.sealey.co.uk



01284 757500



01284 703534



sales@sealey.co.uk