

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1 GENERAL SAFETY

- ▲ **DANGER! Take care when using and moving ladders in the vicinity of power cables - risk of potentially fatal electric shock.**
- **WARNING!** Ensure Health and Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- ✓ Familiarise yourself with the application and limitations of the ladder stand-off, as well as the potential hazards.
- ✓ Maintain the equipment in good condition.
- ✓ Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
- **WARNING!** Use ladder on level and solid ground and either have an assistant stand on the lowest rung or otherwise anchor the base of the ladder to prevent slipping. When viewed from the front, the top of the ladder section(s) must always be directly above the base.
- ✓ Place ladder at an angle of 65° to 70° - foot of ladder 1 metre from wall for each 3 metres up - for stability.
- ✓ Where possible, lash top of ladder to a fixture to prevent slipping.
- **WARNING!** Never over-reach when on the ladder stand-off.
- ✓ Keep children and unauthorised persons away from the working area.
- x **DO NOT** use the ladder stand-off for any purpose other than that for which it is designed.
- x **DO NOT** use the equipment if any parts are damaged or missing as this may cause failure and/or personal injury.
- x **DO NOT** allow children to climb the ladder.
- x **DO NOT** use the equipment when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✓ When not in use store in a safe, dry, childproof area.


2. INTRODUCTION AND CONTENTS

2.1 Introduction

Heat-treated aluminium framed ladder stand-off improves stability and fits to any ladder. The "V" Type design can be used on flat surfaces, corners or over down pipes. Fitted with rubber feet to prevent slipping and positions ladder 250-400mm away from wall. Quick and easy to assemble with a maximum weight capacity of 110kg.

2.2 Contents (Refer to fig.1)

	Qty.
1. Stand-Off Frame	1
2. Brace	1
3. Hook Brackets	2
4. Hooks	4
5. Spring	1
6. Bolt M6x35mm	2
7. Bolt M6x30mm	2
8. Bolt M6x25mm	5
9. Flat Washer	10
10. Nut M6	9

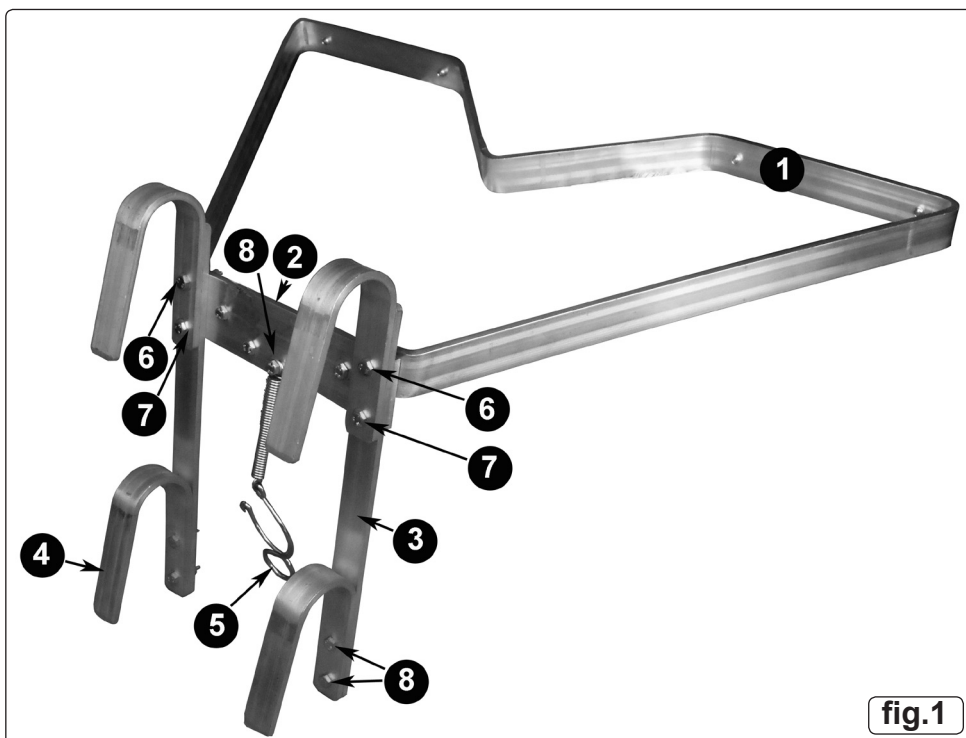

3. ASSEMBLY & USE

3.1 Stand-off Assembly.

- 3.1.1 Assemble the stand-off as in fig.1. The M6x35mm bolts (6) should be used in the topmost holes to secure the hooks (4) and hook brackets (3) through the brace (2) and the stand-off frame (1). Fit flat washers (9) and nuts (10) but do not tighten fully.
- 3.1.2 The M6x30mm bolts (7) should be used for the next row of holes to secure the hooks (4) and hook brackets (3) to the brace (2). Fit flat washers (9) and nuts (10) and fully tighten all nuts securing the hooks (4) and hook brackets (3).
- 3.1.3 Attach the remaining hooks (4) to the lower part of the hook brackets (3) with M6x25mm bolts (8), flat washers (9) and nuts (10).
- 3.1.4 Attach the spring (5) to the brace (2) using M6x25mm bolt (8) and a flat washer (9). Secure at the other side of the brace (2) using a flat washer (9) and a nut (10).

3.2 Attaching the stand-off to the ladder.

- 3.2.1 Place the stand-off assembly on the top rungs of the ladder and secure with spring (refer to fig.2).

☐ **WARNING!** Due to the strength of the spring, caution must be exercised when hooking spring round ladder rung.



4. MAINTENANCE

- 4.1 Periodically check that all nuts are tight and secure, but **DO NOT** overtighten.
- 4.2 Check that the rubber feet on the stand-off are in good condition and are not worn.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP327AR



01284 757500



www.sealey.co.uk



01284 703534



sales@sealey.co.uk