

CD85 / CD85-D Dehumidifier



KEY DESIGN FEATURES

CD85 & CD85-D

- Humidistat Control.
- Status Indicator Panel.
- Temperature Sensitive Defrost.
- Hot Gas Defrost.
- Internal Condensate Pump.
- High Capacity Backward Curved Fan.
- Inlet AirFilter.

CD85-D - Additional Features.

- Digital Humidistat.

HIGH CAPACITY, COMPACT, LOW TEMPERATURE, PROFESSIONAL DEHUMIDIFIER
SUITABLE FOR BOTH DOMESTIC AND INDUSTRIAL APPLICATIONS.

SPECIFICATIONS

SPECIFICATIONS	CD85	CD85-D	FEATURES	CD85	CD85-D
	11293ML-GB	11293GL-GB		11293ML-GB	11293GL-GB
Height (mm)	400	400	On/Off Control	✓	✓
Width (mm)	600	600	Status Indicator Panel	✓	✓
Depth (mm)	345	345	Temperature Sensitive Defrost	✓	✓
Weight (kg)	33	33	Hot Gas Defrost	✓	✓
Voltage (V)	230	230	Manual Humidity Control	✓	
Phase	1	1	Electronic Digital Humidity Control		✓
Frequency (Hz)	50	50	Internal Condensate Pump (0.5m lift)	✓	✓
Current (A)	7	7	Free Standing	✓	✓
Power (KW)	0.88	0.88	1/2" Copper Drain Tube - Outlet	✓	✓
Airflow (m3/hr)	350	350	Pump Fault Indicator	✓	✓
Noise Level (dbA)	57	57	Fitted 13A Plug	✓	✓
			Washable Air Filter	✓	✓
Effective Volume (m3)	237	237	Anti Vibration Rubber Feet	✓	✓
Typical Extraction (l/d)	35	35	Refrigerant	R454c	R454c
Min Operating Temp (°C)	3	3	Steel Construction	✓	✓
Max Operating Temp (°C)	35	35	Stoved Epoxy Textured Finish	✓	✓


AIRFLOW CONFIGURATIONS

By repositioning the CD85 covers, various airflow configurations can be achieved, thereby making the product suitable for a wide variety of installations.

Option 1 - Inline Airflow, exhausting from the opposite end to the inlet.

Option 2 & 3 - allows the warm air to be discharged at 90° to the inlet.

Option 4 - Inlet and Outlet on the same face, consideration to avoid possible recirculation to be given.

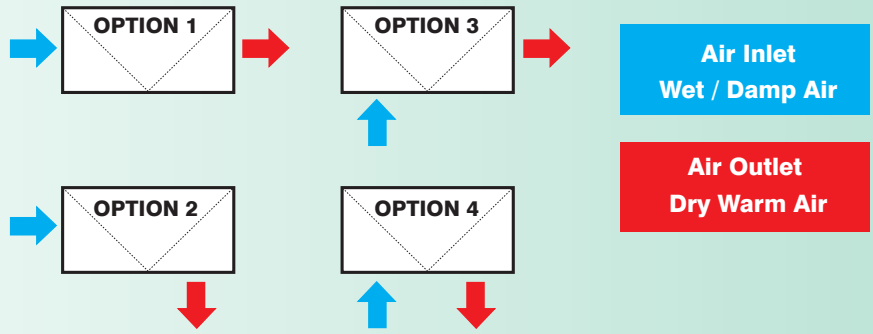

APPLICATION

Huge costs are incurred every year through inflated building maintenance costs and damaged inventory as a result of dampness. EIPL dehumidifiers are effective solutions to environmental control problems. Excess humidity in your premises results in corrosion, mould growth and condensation. By installing an EIPL dehumidifier controlled humidity conditions can be maintained to provide protection in larger commercial areas and buildings.

APPLICATIONS	WM80 / WM80-D
Offices	✓
Shops	✓
Restaurants	✓
Storage Areas	✓
Warehouse	✓
Basements / Cellars	✓
Laboratories	✓
Outward Bound Ctrs	✓
Car Storage Facilities	✓

WHY CHOOSE EIPL ?

EIPL is Europe's leading manufacturer of dehumidifiers and is a name that you can rely on. No matter how extreme the conditions EIPL's efficiency copes comfortably even at the coldest temperatures. All units incorporate a humidistat which enables you to choose the level of dryness to minimise running costs and ensure that there is no over-drying.

THE PROBLEM

Excess humidity in your warehouse, office factory or shop results in corrosion, mould growth and rotting. Enormous costs are incurred every year through damage to inventory and through inflated building maintenance costs as a result of dampness. Even if your building seems dry during the day, at night when the temperature falls the humidity rises and the condensation process begins.

The EIPL CD range of dehumidifiers are ideal solution for humidity control, in a wide variety of applications including offices, apartments, stores, restaurants, museums, store rooms and cellars

THE DEHUMIDIFIER

EIPL dehumidifiers are effective solutions to environmental control problems. The CD range of units, are high capacity dehumidifiers, designed to operate efficiently. The fan draws the moist air through the cold evaporator coil, which cools the air below its dew point. Moisture forms on the evaporator coil and is collected in the condensate tray. Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area.

THE DEHUMIDIFIER

EIPL dehumidifiers are effective solutions to environmental control. Designed to control humidity in medium volume areas, the CD85 is a compact unit suitable for shelf mounting or free standing installations. Typical extraction being up to 35 litres of water in 24 hours.

Two versions are available, manual, dial control, or for a more precise control the digital version. The digital version also provides a constant display of the room humidity level. Operation is simple, switch the unit on and dial in the desired humidity level.

The Status indicator panel, provides a visual indication of the drying process and also fault indication should drain the outlet become blocked

The CD85 incorporates a high capacity backward curved fan making the unit suitable for ducted installations. The washable air inlet filter ensures the internals are kept clean and therefore reduces possible early failure due to dust etc. The temperature sensitive "Hot Gas" defrost system ensures max performance by only defrosting when required, and also quick and efficient clearing of ice from the coils when needed, typically in ambients of less than 18°C

The CD85 is equipment with an internal condensate pump. This pump allows the water to be pumped to a maximum height of approx 0.5m, and ideal for installations where a small lift is required on the drainage outlet



Ebac Industrial Products Ltd

St Helen Trading Estate, Bishop Auckland, Co. Durham. DL14 9AD

Tel: 01388 664400 Fax: 01388 662590 sales@eipl.co.uk www.eipl.co.uk

Ebac Industrial Products, Inc. (Virginia)

USA Head Office
700 Thimble Shoals Blvd, Suite 109, Newport News, Virginia. 2360-62575
Tel: +01 757 873 6800 Fax +01 757 873 3632

sales@ebacusa.com

Ebac Industrial Products, Inc. (California)

West Coast Sales and Distribution Center
2060 Chicago Ave, Suite C7, Riverside, California. 92507
Tel: +01 951 777 9914 Fax: +01 951 462 1341

www.ebacusa.com