

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT

PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. RETAIN THESE INSTRUCTIONS FOR FUTURE USE.


1. SAFETY INSTRUCTIONS


1.1. ELECTRICAL SAFETY

WARNING! It is the responsibility of the owner and the operator to read, understand and comply with the following:

You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. We also recommend that a Residual Current Device (RCD) is used. It is particularly important to use an RCD with portable products that are plugged into a supply which is not protected by an RCCB. If in any doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer. You must also read and understand the following instructions concerning electrical safety.

- 1.1.1. The **Electricity at Work Act 1989** requires that all portable electrical appliances, if used on business premises, are tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- 1.1.2. The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. If in any doubt about electrical safety, contact a qualified electrician.
- 1.1.3. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply. See 1.1.1. and 1.1.2. and use a Portable Appliance Tester.
- 1.1.4. Ensure that cables are always protected against short circuit and overload.
- 1.1.5. Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none is loose.
- 1.1.6. **Important:** Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the recommended fuse - see fuse rating at right.
- 1.1.7. **DO NOT** pull or carry the appliance by the power cable.
- 1.1.8. **DO NOT** pull the plug from the socket by the cable.
- 1.1.9. **DO NOT** use worn or damaged cables, plugs or connectors. Immediately have any faulty item repaired or replaced by a qualified electrician. When a BS 1363/A UK 3 pin plug is damaged, cut the cable just above the plug and **dispose of the plug safely**.
Fit a new plug according to the following instructions (UK only).
 - a) Connect the **GREEN/YELLOW** earth wire to the earth terminal 'E'.
 - b) Connect the **BROWN** live wire to the live terminal 'L'.
 - c) Connect the **BLUE** neutral wire to the neutral terminal 'N'.
 - d) After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable outer insulation extends beyond the cable restraint and that the restraint is tight.

Double insulated products, which are always marked with this symbol , are fitted with live (brown) and neutral (blue) wires only. To rewire, connect the wires as indicated above - **DO NOT** connect either wire to the earth terminal.
- 1.1.10. Products which require more than 3 are supplied without a plug. In this case you must contact a qualified electrician to ensure that a suitably rated supply is available. We recommend that you discuss the installation of an industrial round pin plug and socket with your electrician.
- 1.1.11. If an extension reel is used it should be fully unwound before connection. A reel with an RCD fitted is preferred since any appliance plugged into it will be protected. The cable core section is important and should be at least 1.5mm², but to be absolutely sure that the capacity of the reel is suitable for this product and for others which may be used in the other output sockets, we recommend the use of 2.5mm² section cable.

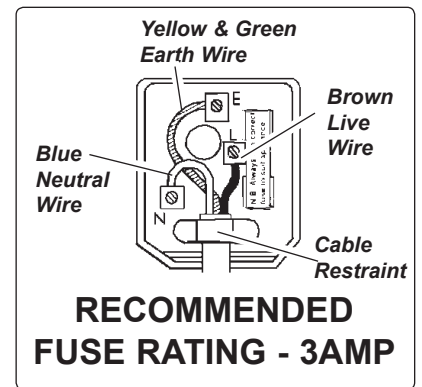

1.2 GENERAL SAFETY

- ✓ Only power the tool from the mains supply.
- ✓ Disconnect the tool from the mains supply before changing accessories, servicing or performing any maintenance.
- ✓ Maintain tool and accessories in good condition. Check moving parts and alignment. If necessary use an authorised service agent.
- ✓ Replace or repair damaged parts using recommended parts. Un-authorized parts may be dangerous and will invalidate the warranty.
- ✓ Wear approved safety eye protection with side shields and a dust mask if generating dust.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings and other loose jewellery and contain long hair.
- ✓ Use the tool in a suitable working area, keep area clean and tidy and free from unrelated materials and ensure that there is adequate lighting.
- ✓ Prevent body contact with earthed surfaces to avoid electric shock e.g. pipes, radiators, refrigerators etc.
- ✓ Maintain correct balance and footing.
- ✓ Keep children and unauthorised persons away from the working area.
- ✓ Secure unstable workpiece with a clamp, vice or other adequate holding device.
- ✓ Avoid unintentional starting. Keep the tool clean for best and safest performance.
- ✓ When not in use switch tool off and unplug it from the mains supply. Store it in the case and place in a dry, childproof area.
- X **DO NOT** operate the tool if any parts are missing or damaged as this may cause failure and/or personal injury.
- X **DO NOT** operate the tool when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- X **DO NOT** over-reach. Ensure the floor is not slippery and wear non-slip shoes.
- X **DO NOT** use the tool for a task it is not designed to perform.
- X **DO NOT** operate tool where there are flammable liquids or gases.
- X **DO NOT** carry the tool by the cable.
- X **DO NOT** hold unsecured work in your hand.
- X **DO NOT** get the tool wet or use in damp or wet locations.
- X **DO NOT** leave the tool running unattended.

2. SPECIFICATION

Supply.....	230V	Noise Pressure.....	76dB.A
Speed Range.....	7200rpm	Accessories.....	Engraving head (1pc)
Motor Power.....	13W	Letter Template (1pc)
Noise Power.....	65dB.A	Number Template (1pc)

3. OPERATING INSTRUCTIONS

3.1 Fitting/Changing Engraving Head

- 3.1.1 Ensure the tool is switched off and unplugged from the mains supply.
- 3.1.2 Unscrew the grub screw in the spindle (fig.1D).
- 3.1.3 Remove the engraving head (fig.1C) and replace with a new one.

3.2 Operation

- 3.2.1 Check that the ON/OFF switch (fig.1A) is set to OFF and then connect the tool to the mains supply. Switch the tool ON
- 3.2.2 Select the stroke required on the rotary control (fig.1B). Its recommend to use a test piece to find the correct stroke suitable for the workpiece.

NOTE: DO NOT switch ON with the engraving head touching the workpiece.

4. MAINTENANCE

4.1 Cleaning

- 4.1.1 Keep the tool ventilation slots clean and free from obstructions. If available blow compressed air into the vents to clear any internal dust (safety goggles must be worn when undertaking this process).
- 4.1.2 Keep the outer case of the tool clean and free from grease.
- 4.1.3 Wipe down with a damp cloth.
DO NOT wash with water or use solvents or abrasives.

4.2 Servicing

To service the tool contact your local Sealey service agent.



Risk of Hand Arm Vibration Injury

Tool Engraver Model No. E541 when operated in accordance with these instructions and tested in accordance with BS EN 28662-1:1993, ISO 8662-1:1988 results in the following vibration emission declared in accordance with BS EN 12096:1996.

Measured vibration emission value: 1.76m/s²

Uncertainty: 0.70m/s²

These values are suitable for comparison with emission levels of other tools that have been subject to the same test.

This tool may cause hand-arm vibration syndrome if its use is inadequately managed.

Recommended Measures to reduce risk of hand-arm vibration syndrome:

This item represents a low Hand Arm Vibration risk to users. The calculated maximum usage period exceeds 8 hours. We recommend appropriate safety equipment is utilised and regular breaks for the operator are employed to reduce any residual risk of fatigue or repetitive strain injury.

Environmental Protection



Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycle centre and disposed of in a manner which is compatible with the environment.



When the product is no longer required, it must be disposed of in an environmentally protective way.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR



01284 757500



www.sealey.co.uk



01284 703534



sales@sealey.co.uk